EdgeX Foundry Core Working Group

(plus QA/Test, System Management and UI)
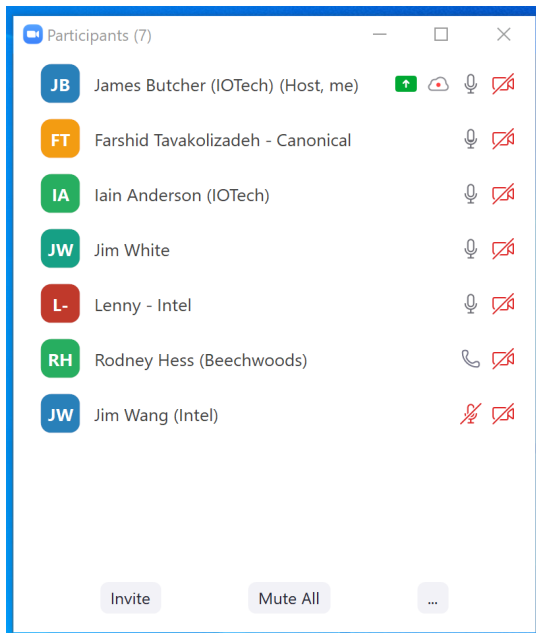
12th May 2022

Attendees

Agenda

- TAF Status
  - Functional tests: 594 - all passing
  - Integration tests: 47 - all passing
  - Performance tests: 10 - all passing
- Main Work
  - On hold because of Kamakura code freeze
    - TUI PR being merged
  - TAF tests being added for Dynamic Device Profiles (Melody)
- Other
  - IOTech team will run TAF performance tests on Kamakura release on real hardware
  - Levski planning and Github project board updates
    - Will coordinate board resets during planning next week

Ticket Status

- Core WG [Project Board](#)
  - go-mod-bootstrap
    - New issues
      - [#336](#) --registry flag ignores ENV overrides for service hosts
  - go-mod-core-contracts
    - Fixed issues
      - [#729](#) CommandClient mock was not regenerated
  - edgex-go
    - New issues
      - [#4005](#) "couldn't create client" when repeating to restart services
    - Fixed issues
      - [#4007](#) Add response 400 to DELETE device resource in core-metadata Swagger file
      - [#4015](#) Need deep copy on MessageBus Optional config
  - edgex-docs
    - Fixed issues
      - [#742](#) [Metrics] Document recent enhancements
      - [#702](#) Make sure supported architectures are addressed plainly/clearly early in the documentation

  - edgex-compose
    - In Progress Issues
      - [#234](#) [Compose Builder] Add service for new ASC metrics-influxdb profile
    - Fixed issues
      - [#235](#) No delayed-start services found in compose files
- QA/Test Issues [Project Board](#)
  - edgex-taf
    - New issues
      - [#665](#) [performance test] Fetch image size of spiffe related service
    - Fixed issues
      - [#647](#) Implement testcase for PATCH device resource
      - [#648](#) Implement testcase for DELETE device resource
      - [#651](#) Implement testcase for DELETE device command
      - [#650](#) Implement testcase for PATCH device command
      - [#646](#) Implement testcase for POST device resource
      - [#649](#) Implement testcase for POST device command