

EXAMPLE 1 – Camera image


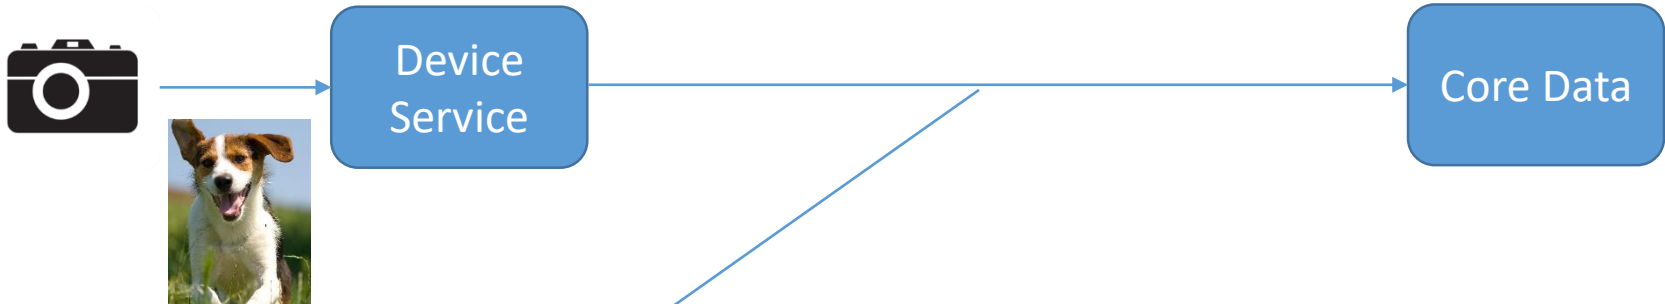



Image in native format

Value Descriptor created by DS and used to identify payload of value.

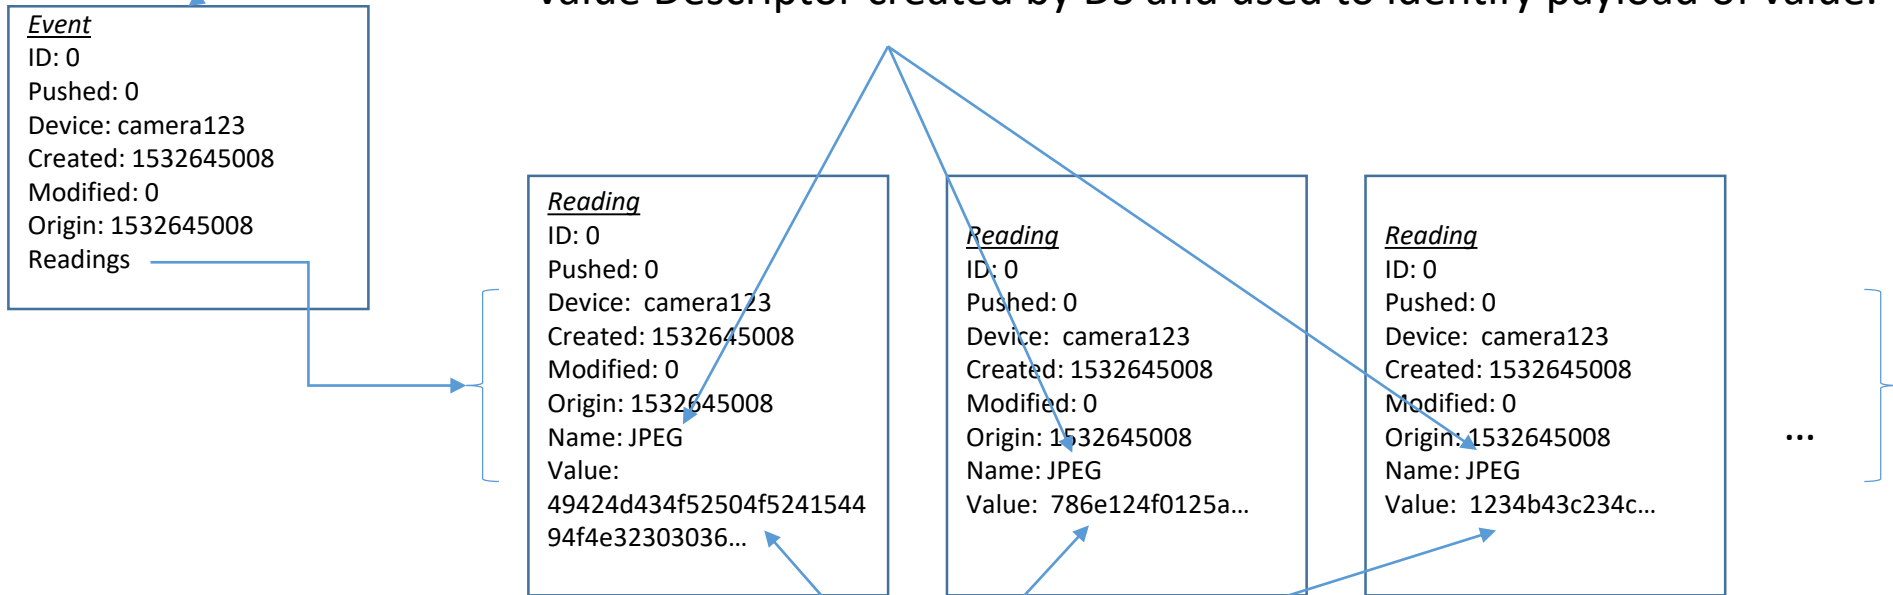

“Chunks” of the image in CBOR encoded byte array with none exceeding 16MB size

EXAMPLE 2 – audio content

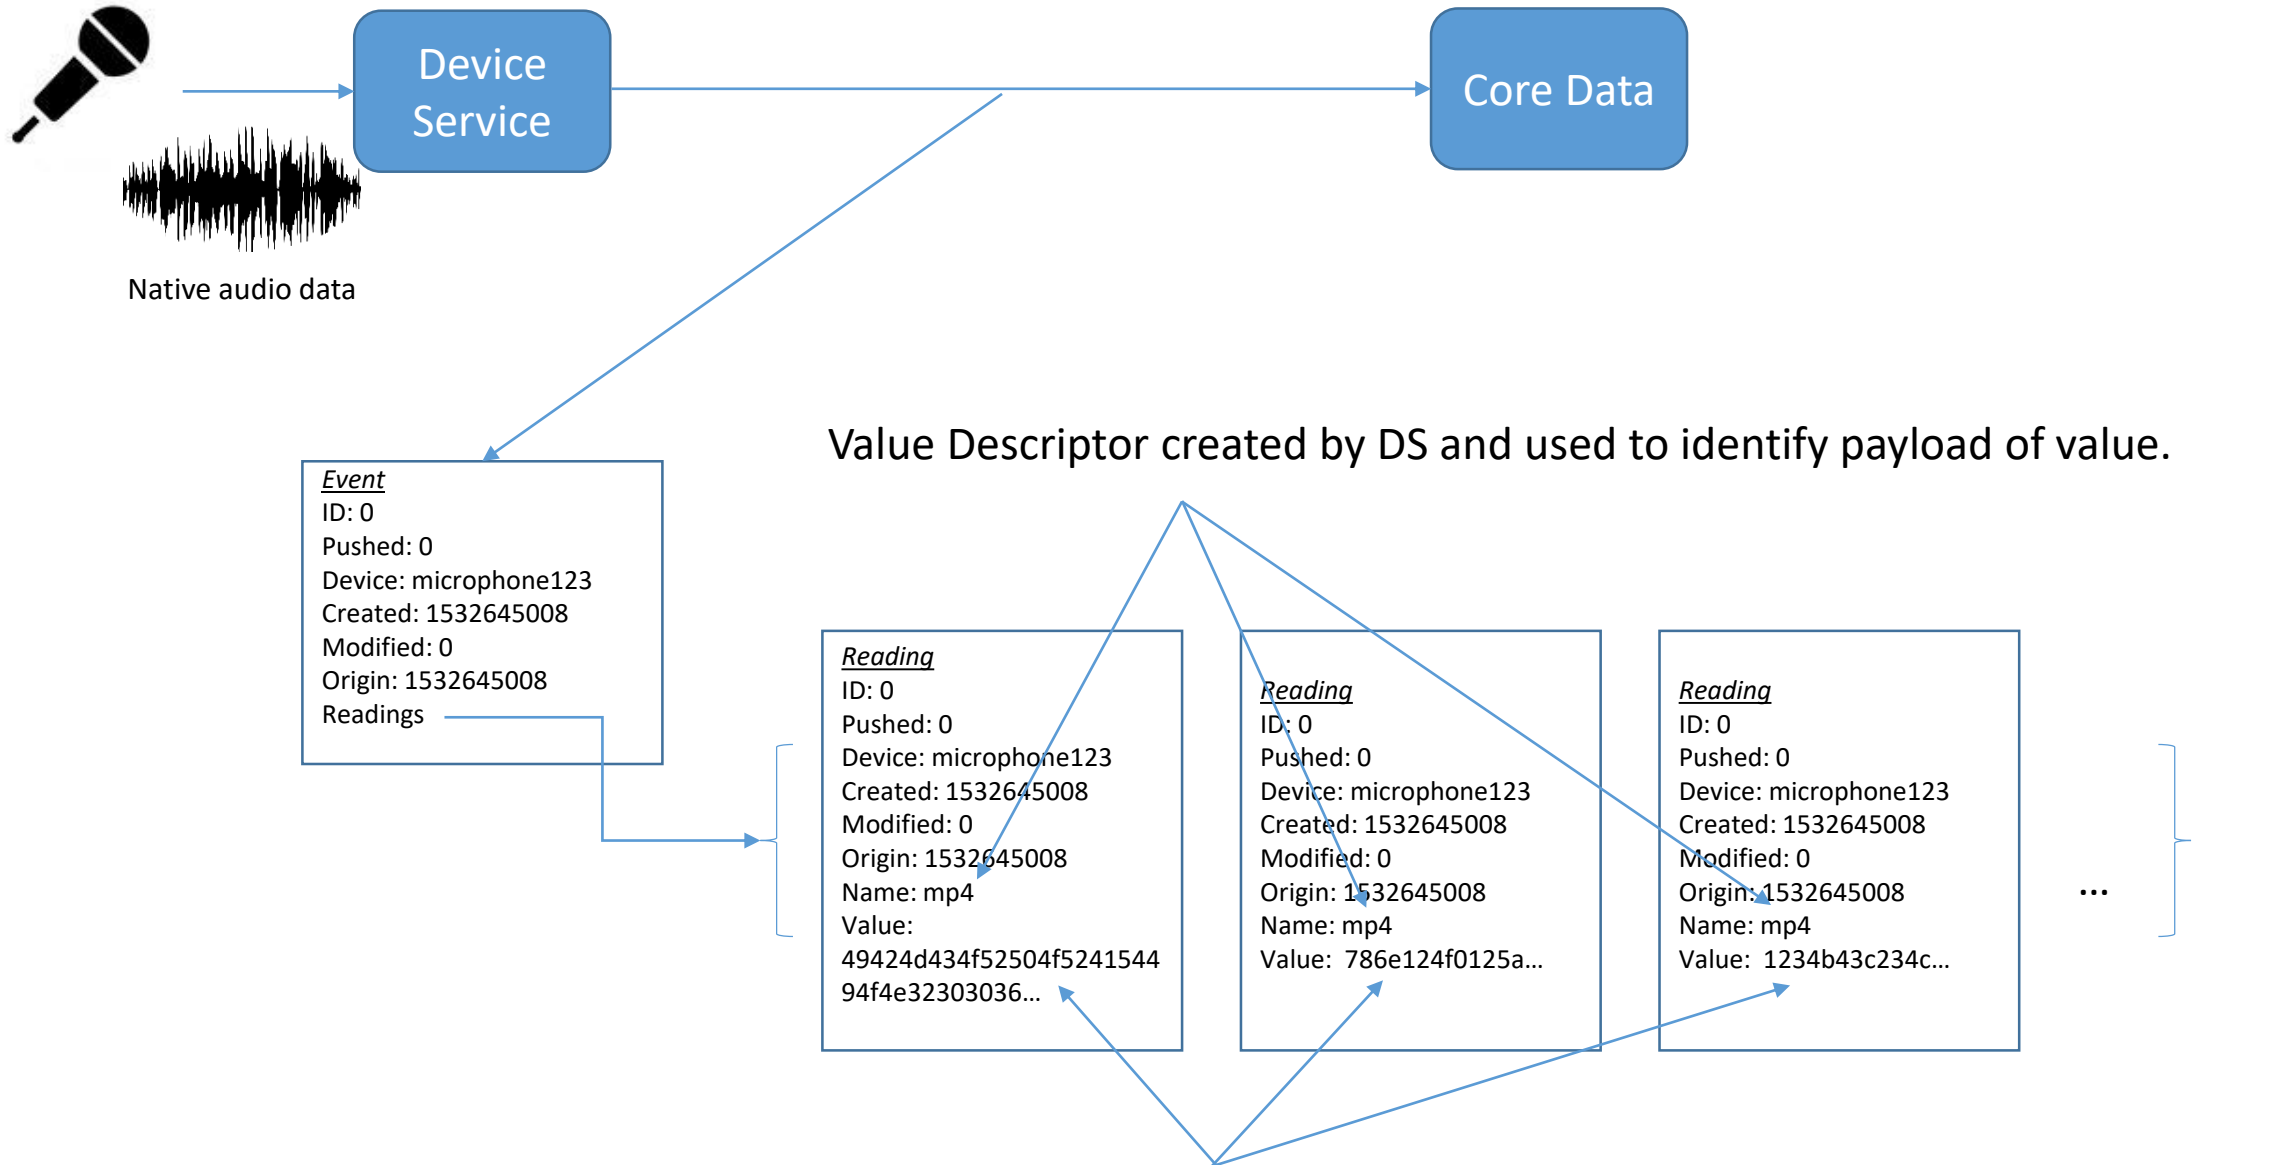

“Chunks” of the audio in CBOR encoded byte array with none exceeding 16MB size

Example: adding additional "tags" or metadata added to the event data for use on the backend

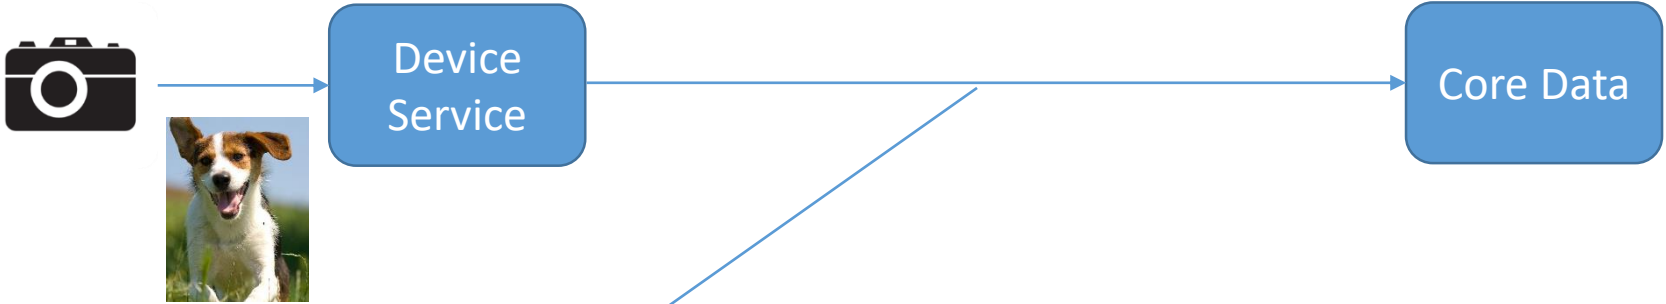


Image in native format

Value Descriptors created by DS and used to identify payload of value.

