


EXAMPLE 1 – Camera image

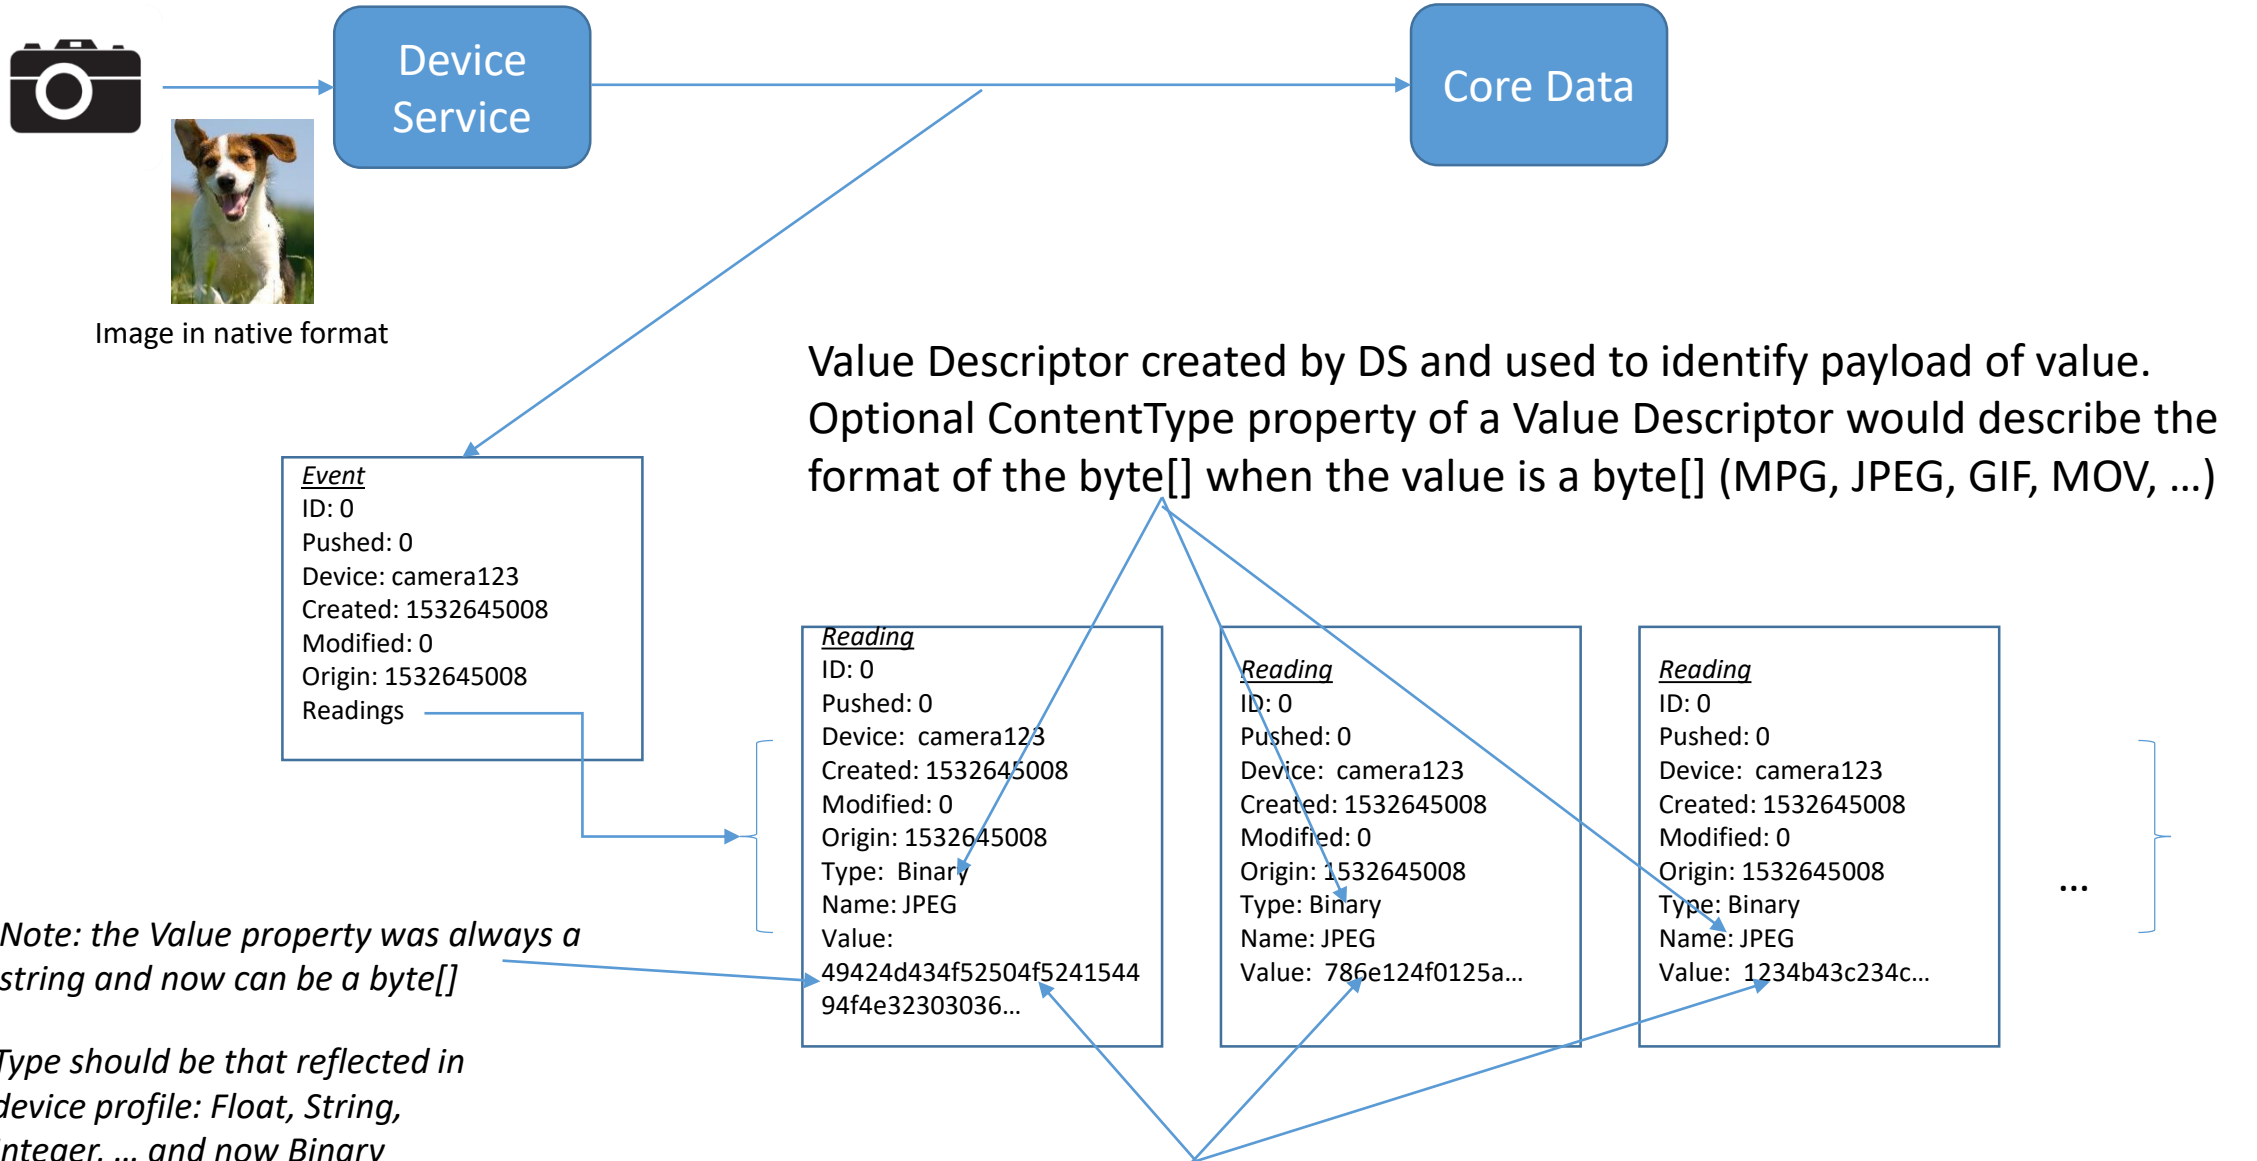

Value Descriptor created by DS and used to identify payload of value. Optional ContentType property of a Value Descriptor would describe the format of the byte[] when the value is a byte[] (MPG, JPEG, GIF, MOV, ...)

“Chunks” of the image in CBOR encoded byte array with none exceeding 16MB size





EXAMPLE 2 – audio content



Native audio data



Value Descriptor created by DS and used to identify payload of value. Optional ContentType property of a Value Descriptor would describe the format of the byte[] when the value is a byte[] (MPG, JPEG, GIF, MOV, ...)

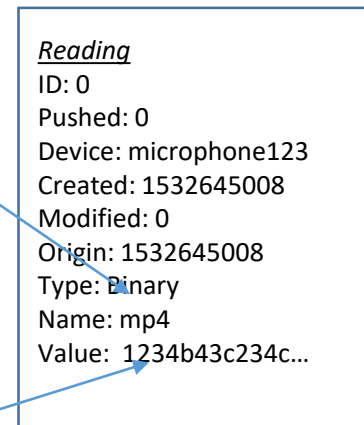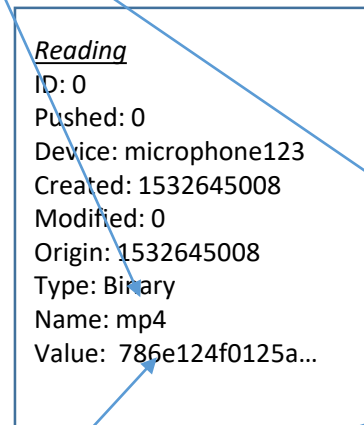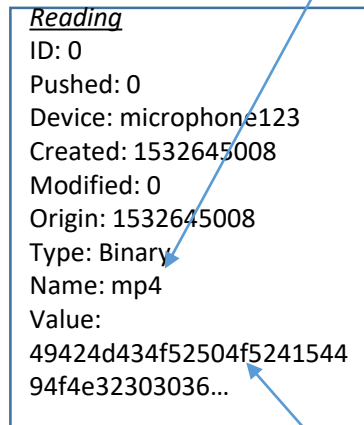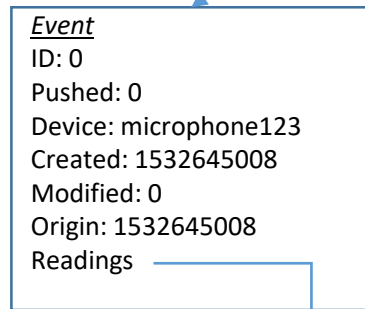

...

“Chunks” of the audio in CBOR encoded byte array with none exceeding 16MB size

Example: adding additional "tags" or metadata added to the event data for use on the backend

